


**TYPICAL INSTALLATION-
2" SERVICE DUCTILE IRON MAIN**

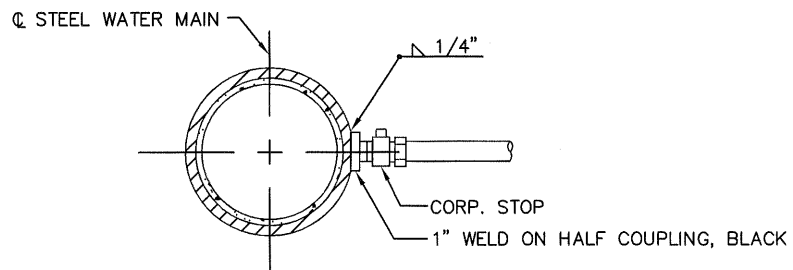

TYPICAL INSTALLATION- 2" SERVICE STEEL MAIN

NOTES:

- ① FRONT OF METER BOX TO BE LOCATED 6" BEHIND BACK OF WALK FOR SIDEWALK ADJACENT TO CURB AND 4" BACK OF CURB FOR SIDEWALK ADJACENT TO RIGHT OF WAY, UNLESS OTHERWISE SPECIFIED.
- ② RUN COPPER, TYPE "K", SERVICE TO PROPERTY LINE OR AS REQUIRED AND CAP/MINIMUM 36"
- ③ METER (1 1/2" OR 2") SHALL BE SUPPLIED BY THE CITY AT CONTRACTOR'S EXPENSE, UNLESS OTHERWISE APPROVED.
- ④ ALL FITTINGS TO BE SOLDERED FROM CORP. STOP TO CURB STOP USING SILFLUX 15% SILVER SOLDER EXCEPT THE CORP. STOP WHICH WILL BE A COMPRESSION CONNECTION..
- ⑤ SLEEVE TUBING RUNS IN CORROSIVE SOILS AREAS.



APPROVED BY:		24079 4/1/5	
JOHN P. SULLIVAN CITY ENGINEER		RCE	DATE
RECOMMENDED:		57875 3/14/5	
ASST. UTIL. DIRECTOR/ENG.		RCE	DATE
REV	DESCRIPTION	BY	APP'D DATE

CITY OF ONTARIO

2" WATER SERVICE

STANDARD
DRAWING
NUMBER

4202