



W/ STRIPED MEDIAN

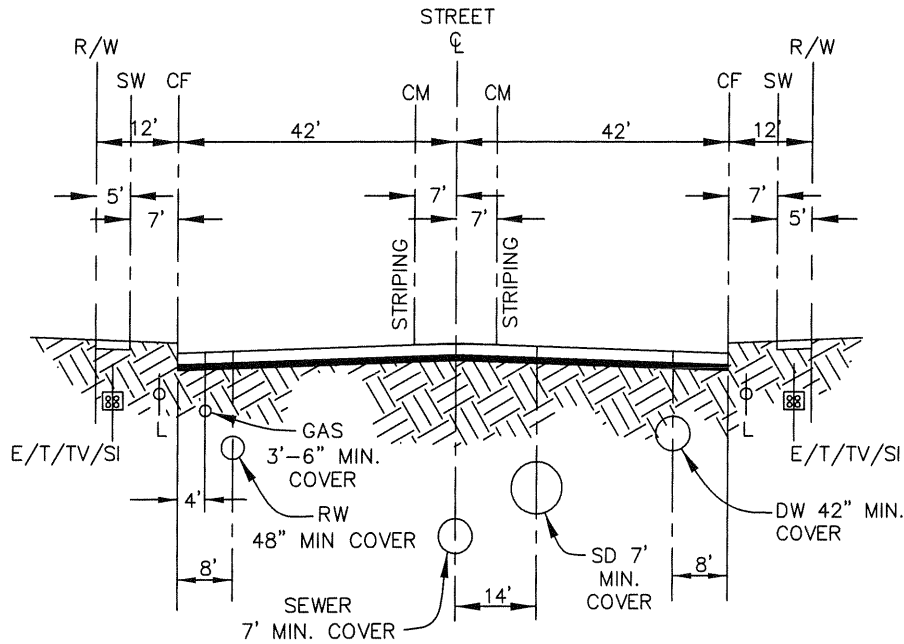

CM = CURB MEDIAN
CF = CURB FACE
SW = SIDEWALK
R/W = RIGHT OF WAY
DW = DOMESTIC WATER
G = GAS
L = STREET LIGHTING
RW = RECLAIMED WATER
S = SEWER
SD = STORM DRAIN
T = TELEPHONE/FIBEROPTIC
TV = CABLE TELEVISION
E = ELECTRICAL
SI = SIGNAL INTERCONNECT

TYP. UTILITY LAYOUT (B)
(SECTION LOOKING NORTH AND WEST)
NTS

W/ NO MEDIAN

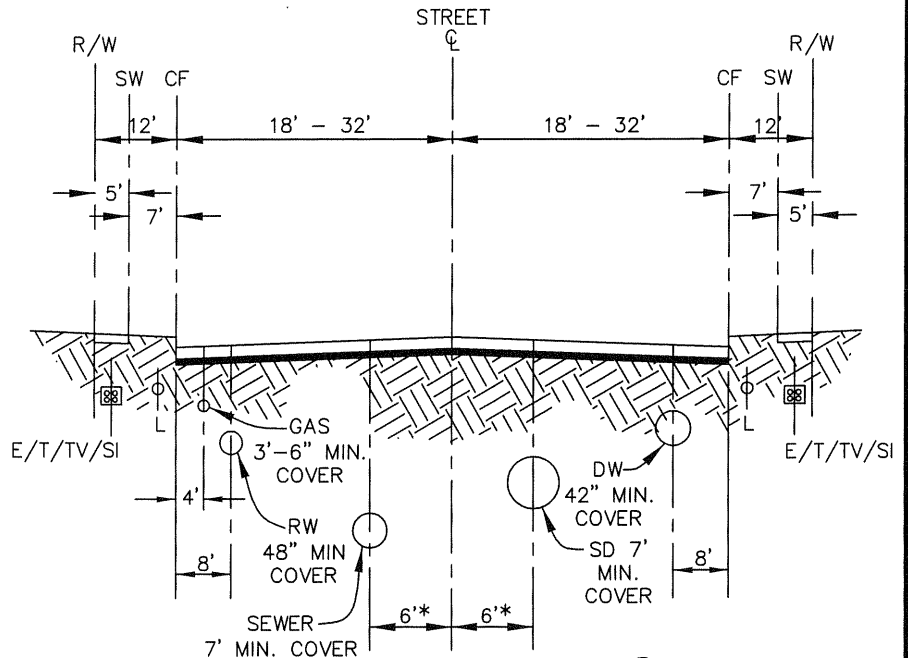

TYP. UTILITY LAYOUT (C)
(SECTION LOOKING NORTH AND WEST)
NTS

NOTE:

1. PROVIDE 1' MIN. CLEARANCE AT UTILITY CROSSINGS
2. BETWEEN CURBS, COVER FOR LATERALS SHALL NOT BE LESS THAN 30" BELOW ROADWAY SURFACE.
3. MIN. SEPARATION BETWEEN WATER AND SEWER SHALL BE PER CITY STANDARD DRAWING NUMBER 4001.
4. VARIATIONS FROM STANDARD WILL REQUIRE PRIOR APPROVAL FROM CITY ENGINEER.
5. SEE STANDARD DRAWING 5203 FOR CURB RETURN AREA CLEAR ZONES.

* FINAL LOCATION TO BE DETERMINED
BASED ON LANE CONFIGURATION,
MANHOLES AND VALVES TO BE PLACED
OUTSIDE THE WHEEL LINE.



APPROVED BY:		24079 05/16/07	
JOHN P. SULLIVAN CITY ENGINEER		RCE	DATE
RECOMMENDED:		44485 05/16/07	
ASSISTANT CITY ENGINEER		RCE	DATE
REV	DESCRIPTION	BY	APP'D DATE

CITY OF ONTARIO

UTILITY LOCATIONS FOR
STANDARD STREET
SECTIONS

STANDARD
DRAWING
NUMBER

1303