


TYP. UTILITY LAYOUT

(SECTION LOOKING NORTH AND WEST)

N.T.S.

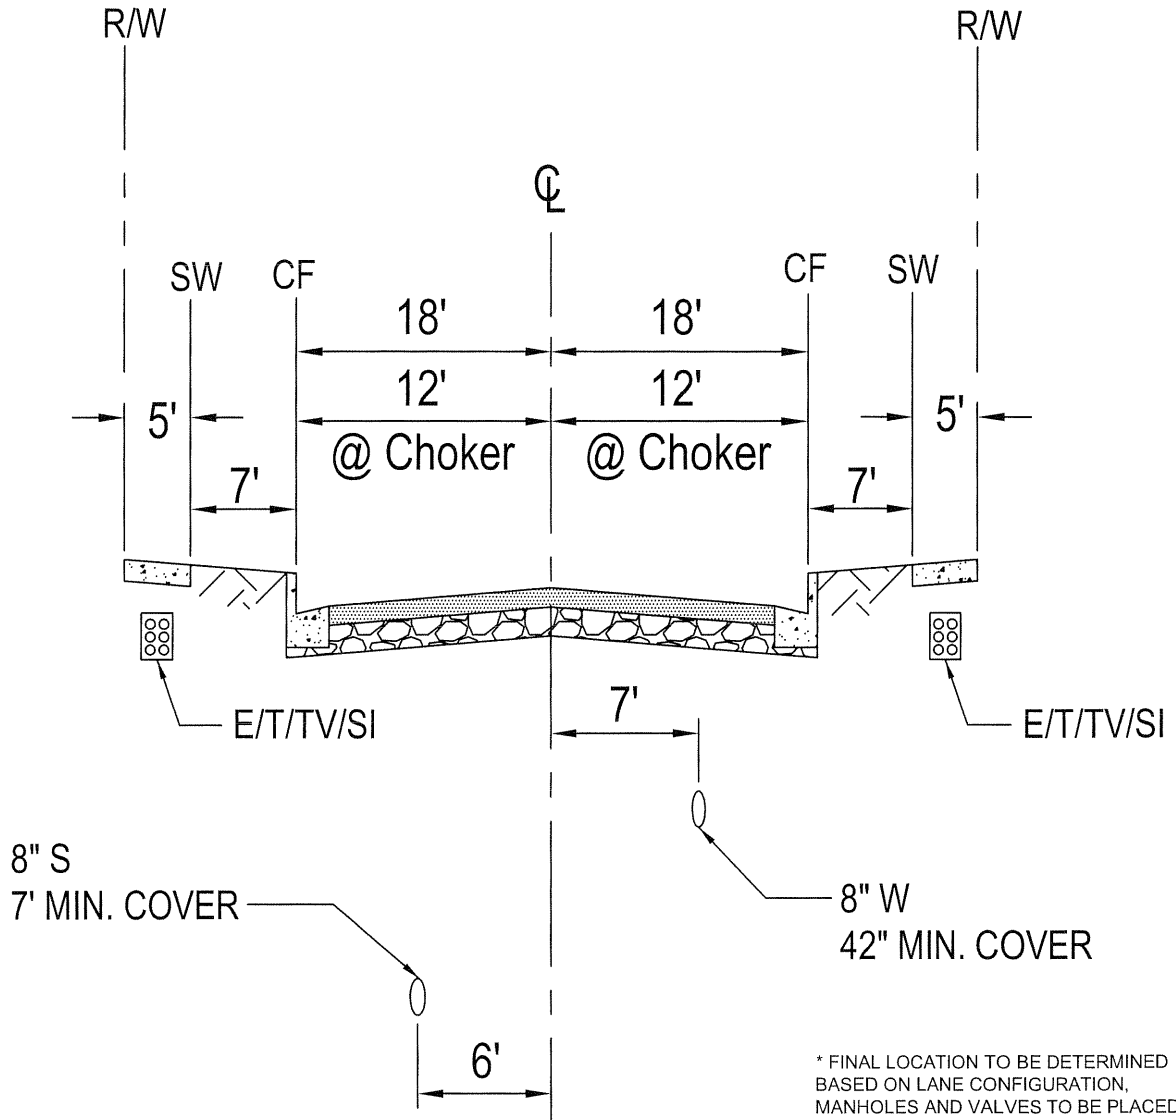

NOTE:

1. PROVIDE 1' MIN. CLEARANCE AT UTILITY CROSSINGS
2. BETWEEN CURBS, COVER FOR LATERALS SHALL NOT BE LESS THAN 30" BELOW ROADWAY SURFACE.
3. MIN. SEPARATION BETWEEN WATER AND SEWER SHALL BE PER CITY STANDARD DRAWING NUMBER 4001.
4. VARIATIONS FROM STANDARD WILL REQUIRE PRIOR APPROVAL FROM CITY ENGINEER.
5. SEE STANDARD DRAWING 5203 FOR CURB RETURN AREA CLEAR ZONES.

CM = CURB MEDIAN
 CF = CURB FACE
 SW = SIDEWALK
 R/W = RIGHT OF WAY
 DW = DOMESTIC WATER
 G = GAS
 L = STREET LIGHTING
 RW = RECLAIMED WATER
 S = SEWER
 SD = STORM DRAIN
 T = TELEPHONE/FIBEROPTIC
 TV = CABLE TELEVISION
 E = ELECTRICAL
 SI = SIGNAL INTERCONNECT



APPROVED BY:		24079 3/30/07	
JOHN P. SULLIVAN CITY ENGINEER		RCE	DATE
RECOMMENDED:		57875 3/30/07	
ASST. UTIL. DIRECTOR/ENG.		RCE	DATE
REV	DESCRIPTION	BY	APP'D DATE

CITY OF ONTARIO

UTILITY LOCATIONS (2)
 FOR LOCAL STREET
 SECTIONS (W/Wo
 CHOKERS)

STANDARD
 DRAWING
 NUMBER

1313