


PLAN

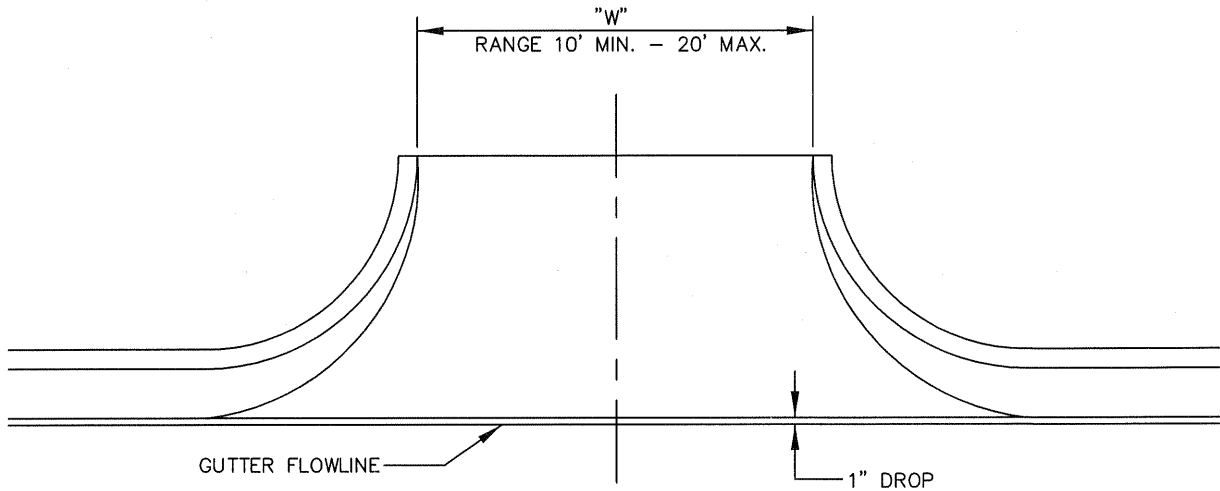

ELEVATION

### NOTES

1. RESIDENTIAL DRIVEWAY II CAN BE USED FOR SINGLE FAMILY RESIDENTIAL AND ALLEYS. USE ONLY WITH APPROVAL OF CITY ENGINEER.
2. RADIUS OF CURB RETURNS SHALL BE SYMMETRICAL.
3. W=26 FEET MINIMUM FOR RESIDENTIAL DRIVEWAY SERVICING 9 OR MORE DWELLING UNITS.
4. W=24 FEET MINIMUM IF REQUIRED BY FIRE DEPARTMENT FOR EMERGENCY ACCESS.
5. CONCRETE FOR DRIVEWAY CONSTRUCTION SHALL BE CLASS 520-C-2500 PER SECTION 201 OF THE STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION, CURED WITH TYPE 1-D CURING COMPOUND.



APPROVED BY: <i>John P. Sullivan</i>				
24079 8/08/06				
JOHN P. SULLIVAN CITY ENGINEER RCE DATE				
RECOMMENDED: <i>Louis M. Young</i>				
44485 8/07/06				
ASSISTANT CITY ENGINEER RCE DATE				
REV	DESCRIPTION	BY	APP'D	DATE

CITY OF ONTARIO

RESIDENTIAL  
DRIVEWAY ACCESS II

STANDARD  
DRAWING  
NUMBER

1205