


REFERENCE STD. NO.	STREET TYPE	"A" R/W 1/2 WIDTH	"B" STREET 1/2 WIDTH	"C" CURB RET. RADIUS	"D" BACK OF WALK RAD.	"E" PARKWAY RADIUS
1001	STANDARD ARTERIAL	50'	38'	35'	18'	7'
1002	DIVIDED ARTERIAL	60'	47'	40'	17'	8'
1004	LOCAL	30'	20'	25'	10'	5'
1004	LOCAL	33'	20'	25'	7'	8'
1003	COLLECTOR	44'	32'	25'	13'	7'
1005	LOCAL INDUSTRIAL	33'	24'	25'	11'	4'



NOTES

1. CONCRETE SHALL BE CLASS 520-C-2500 PER SECTION 201 STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION, CURED WITH TYPE 1-D CURING COMPOUND.
2. SCORE LINES SHALL BE 5' ON CENTER.
3. WEAKENED PLANE JOINTS SHALL BE AT 10' ON CENTER MAXIMUM. SEE DRAWING ABOVE FOR DISTANCE FROM CURB RETURN AREA TO FIRST JOINT.
4. THE HIGHER STREET CLASSIFICATION SHALL BE USED TO ESTABLISH THE CURB RETURN RADIUS AT A PARTICULAR STREET INTERSECTION, AS SHOWN ABOVE.
5. LARGER RADII MAY BE REQUIRED AT THE DISCRETION OF THE CITY ENGINEER, DEPENDING ON THE EXPECTED TRAFFIC NEEDS.

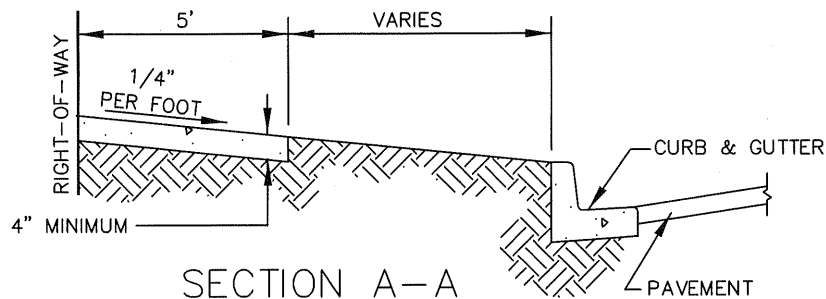

APPROVED BY: <i>John P. Sullivan</i> 24079 8/08/06				
JOHN P. SULLIVAN CITY ENGINEER RCE DATE				
RECOMMENDED: <i>Jim Minich</i> 33340 8/07/06				
ASSISTANT CITY ENGINEER RCE DATE				
REV	DESCRIPTION	BY	APP'D	DATE

CITY OF ONTARIO

**SIDEWALK
CONSTRUCTION
ADJACENT TO
RIGHT-OF-WAY**

STANDARD
DRAWING
NUMBER

1210